




Peripheral fixing

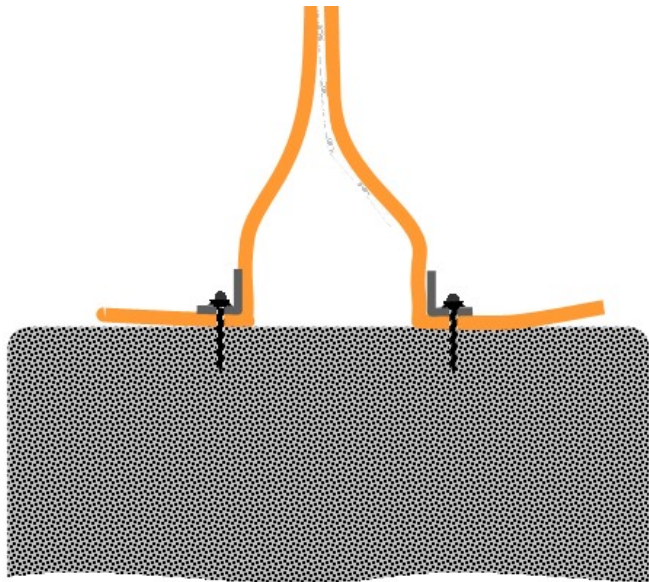

Vertical & horizontal joining seams

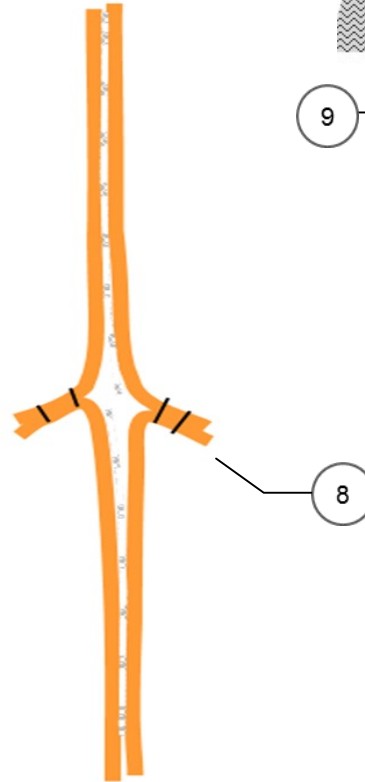

Top Fix detail

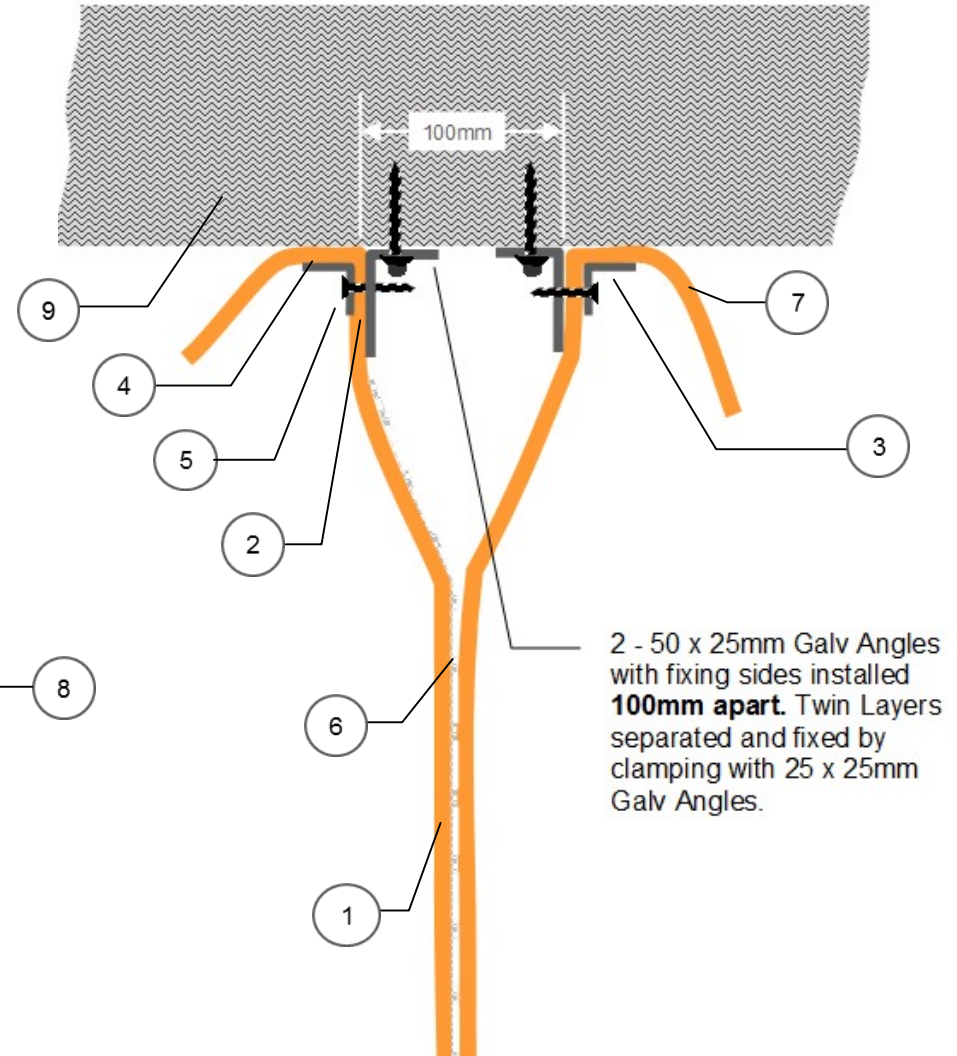

2 - 50 x 25mm Galv Angles with fixing sides installed **100mm apart**. Twin Layers separated and fixed by clamping with 25 x 25mm Galv Angles.

#	DESCRIPTION	NOTES
1	FIREHALT 120:60	Twin Layer Barrier
2	50 X 25mm GALV ANGLE	
3	25 X 25mm GALV ANGLE	
4	FIRE RATED ANCHOR FIXINGS	250mm Fixing Centres
5	SELF TAP SCREWS	250mm Fixing Centres
6	GLUE POINTS	Heat Sensitive Adhesive
7	100mm OVERLAPS	
8	50mm JOINING SEAMS	2 rows 12mm Staples at 100mm centres
9	SLAB / ROOF SHEET	



Tel : +44 (0)161 344 2484
 Fax : +44 (0)161 344 2486
 Email : sales@culimeta-saveguard.com
 Web : www.firehalt.com

This fixing detail is for guidance purposes only. Seek approval from Building Control or a qualified fire engineer before installation

Title: 120:60 Fixing from both sides	Products: Firehalt 120:60	Fix Detail : # 9
Certification Ref: LPCB 552a 01		