



Option 1. Secure to wall through galv angle with suitable Fixings at 250mm centres

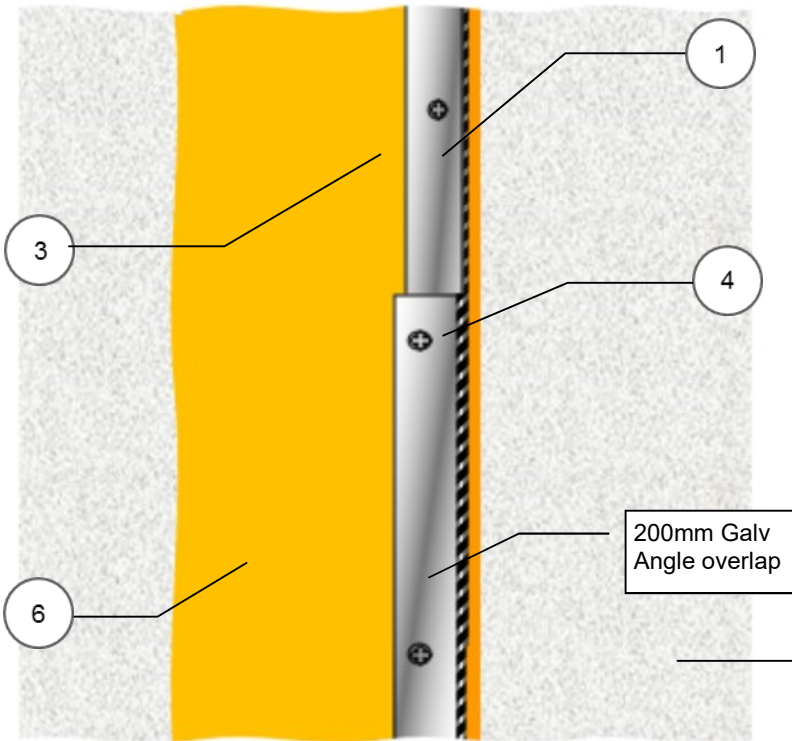

Option 2. First secure 50mm stud to wall with suitable fixings at 250mm centres.

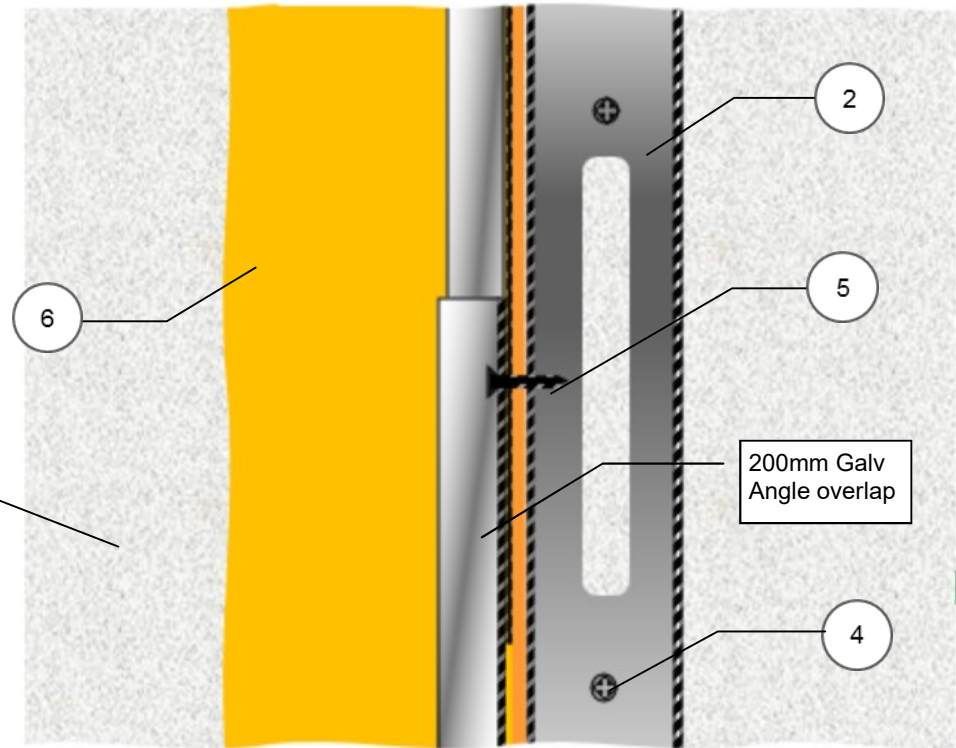

#	DESCRIPTION	NOTES
1	FIREHALT BARRIER	CROSS SECTION
2	50mm STUD/50 X 25mm GALV ANGLE	250mm FIXING CENTRES
3	25 X 25mm GALV ANGLE	250mm FIXING CENTRES
4	ANCHOR FIXINGS	
5	SELF TAP SCREWS	
6	100mm OVERLAP	
7	SIDE WALL	



Tel : +44 (0)161 344 2484
 Fax : +44 (0)161 344 2486
 Email : sales@culimeta-saveguard.com
 Web : www.firehalt.com

IMPORTANT
 This detail is for guidance only. It does not infer any warranty or suitability for a given application

Title: Standard Side Fix	Products: All Products	Fix Detail : # 2
Certification Ref: All Products		