

FIREHALT ACCESS HATCH ASSEMBLY 1200 X 600


Introduction:

The Firehalt Access Hatch is a proprietary unit having up to 120mins fire rating but the design has been adapted so it is suitable for use with a range of Firehalt barrier systems.

As part of the unique design the unit comes with a panel of Firehalt 120:30 already fitted and secured to the rear of the hatch frame. The highest 120/30 fire rating ensures the assembly can be used with other lower rated barriers within the Firehalt range. The surrounding barrier panel is 1300mm wide and 2000mm long.

The assembly is installed into a 'H' section supporting frame as detailed in our fitting instructions ref. #20.

The metal hatch is factory fitted with a continuous piano hinge and two square drive operated locks that are riveted to the return fold of the door tray with a swivel tongue locating into slots in the frame. Interlocking Active Fire Pins (circled) are also fitted forming part of the fire security locks.

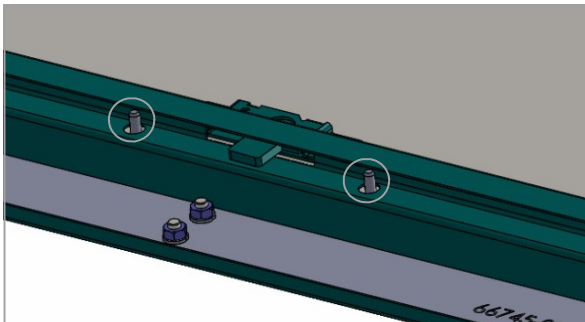

Physical Properties:	Product code :	FIR-ACC-HAT-1200-600
	Description :	Frame & door tray -1.0mm & 1.2mm Zintec coated M/S with polyester powder coated finish.
	Colour :	White RAL 9010 20% Gloss
	Dimensions :	Outer frame 695mm x 1300mm



Culimeta-Saveguard Ltd,
+44 (0)161 344 2484
www.firehalt.com



The information on this Data Sheet is provided in good faith. However, the company reserves the right to alter or update this data as and when additional information is received. Firehalt products should only be fitted in accordance with the guidelines provided by the manufacturer. Any deviations must be authorised by the manufacturer or their representatives.

Issue No:	1	Page:	1 of 1	Dated:	18/11/2019	File Ref:	Prodata firehalt Mk3 Hatch 1200 600	.pdf
-----------	---	-------	--------	--------	------------	-----------	-------------------------------------	------